


DECKZONE



PŁYTY GUMOWE NA TARASY I BALKONY






DECKZONE

RUBBER TILES FOR DECKS AND BALCONIES

Rubber deck tiles with **frost-resistant, water-permeable and anti-slip properties.**



COMFORT

Frost-resistant, water-permeable, slip-resistant, UV resistant. Pleasant for children in play areas.



THERMAL INSULATION

Good thermal insulation increasing comfort when playing on this type of surface.



VIBRATION ISOLATION AND VIBROACOUSTICS

Good damping and shock absorbing as well as soundproofing properties increase the comfort of use.



ANTI-SLIP PROPERTIES

High resistance to permanent deformation - the tile structure improves stability and anti-slip properties.



FLAME-RETARDANT AND SELF-EXTINGUISHING

Flammability classes B_{fl}-s1 or C_{fl}-s1 and self-extinguishing properties allow for application of **NONFLAMMABLE** tiles where those properties are required




INSTALLATION

Laying on the floor, concrete, EPDM membrane, roofing felt. Quick installation with connecting pegs (tile interlocks) or gluing to the floor.



Tile types



Glued tiles
500 x 500 x 20 mm



Glued tiles
1000 x 1000 x 20 mm



Tiles with pegs
500 x 500 x 30 mm



Interlocking dog bone pavers
pattern panels 1000 x 1000 x 20 mm

NONFLAMMABLE

Available also as flameretardant rubber tiles with self-extinguishing properties.
Flammability classes available: B_{fl}-s1 and C_{fl}-s1.

Available colours

SBR tiles



black



dark grey



gray




red



green

Specifications

| | |
|-------------------|--|
| PRODUCT NAME | DECKZONE frost-resistant tiles |
| APPLICATION | decks and balconies, open fire zones, e.g. radiant heaters, barbecues, fireplaces, etc. outdoor play areas for nursery children, play areas, recreational paths, anti-slip surfaces around garden pools, ice rinks, etc. |
| DIMENSIONS | tiles: 500 x 500 mm and 1000 x 1000 mm ± 1%; thickness: 20 mm – glued to the floor tiles: 500 x 500 mm ± 1%; thickness: 20 mm – joined together with pegs interlocking dog bone pavers pattern panels – thickness: 20 mm |
| PROPERTIES | frost-resistant, anti-slip, water-permeable, variable structure improves stability and anti-slip properties hygiene approval, UV-resistant, ageing tested, TUV certificate NONFLAMMABLE version with non-flammable and self-extinguishing properties |
| AVAILABLE COLOURS | 5 colours for SBR tiles 24 colours for EPDM tiles – RAL palette |
| CUSTOMIZATION | tiles customization – graphics / logo etc. overlaying system |

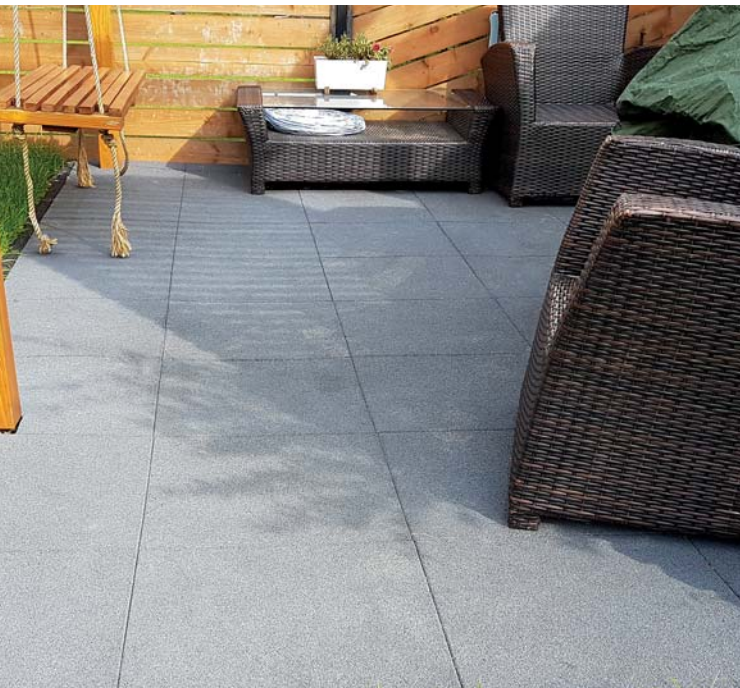

ELS POLAND Sp. z o.o.
Ważewskiego 66
30-499 Cracow, Poland

biuro@flexizone.pl
www.flexizone.pl

Office
+48 736 934 907

Sales
+48 519 496 630
+48 508 898 946
+48 799 949 517

